





NEXTSTATION-X

The intelligent, compact design of the NextStation-X allows for both easy transport and expandability. Its short 12" depth and rack mount options for front I-O or rear I-O access make it ideal for M&E production and live event use cases including broadcast trucks or other vehicles. It is ideal to use as a workstation for on-set production rendering, encoding, graphics editing, color correction, streaming, ISO recording, and more.

- Single or dual Intel processors
- No-tools removable storage options include NVME, SAS/ SATA SSDs, and SATA 6G SSDs
- Includes Secure Boot UEFI compliant BIOS, Intel Boot Guard, TPM2.0 trusted Platform
- Certified for CentOS, Red Hat Enterprise Linux, VMware vSphere, Windows Server, Windows 10
- PCI Express 3.0 expansion slots for purpose-built I-O configurations and FPGA or GPU co-processing
- Systems are stackable, cooling front to back
- Includes service and maintenance documents for easy field access, service, and installation of PCIe cards
- Compliant with the NextComputing Supply Chain Risk Management Process

Smallest form factor, highest performance: as a desktop or short depth rack mount

Easily transportable:

System and hard case combined are less than 35lbs for single-person lift and as aircraft carry-on

Modular and purpose-

built: Configure your power, storage, and expansion options for your specific highperformance use case

High-performance workstation: Ideal for rendering and scientific simulation

NEXTSTATION-X


	Standard
Available CPUs	 Single Intel Single Intel Xeon Scalable Processor Family Single Intel Core i7 and Core i9 Processor family
Memory	 Intel Xeon to 1TB 2666MHz DDR4 ECC memory Intel Core Processors to 512GB 2666MHz DDR4 memory
PCI Expansion	 4 PCI Express 3.0 slots PCI Express slots 1 and 3 (x16) support full length cards, including (2) single-width and dual-width high-performance NVIDIA GPUs
AI	Configurations available with up to (4) NVIDIA A2 Tensor Core GPU for Artificial Intelligence (AI)/machine learning at the Edge
Storage	 Up to (4) removable 2.5" NVME SSDs with capacities up to 15.36TB per SSD and 1 or 2 M.2 SSDs up to 4TB per module or 2 removable 2.5" SATA 6G SATA SSDs up to 4TB per SSD -or- Up to (8) removable 2.5" 12G SAS up to 15.36TB per SSD / 6G SATA SSDs up to 4TB per SSD and 1 or 2 M.2 SSDs to 4TB per module or 2 removable 6G SATA SSDs up top 4TB per SSD
RAID	Configuration options for up to (3) separate hardware RAIDs and multiple RAID array types including RAID 0, 1, 5, and 6 depending on use cases
Sustained Writes	 NVME to 3.3GB/Second per drive (2 drives total) 12G SAS RAID 5 of 8 drives sustained at 6.3 GB Reads and 3.7 GB Writes 6G SATA RAID 5 of 8 drives sustained 2.8 GB Reads / 2.6 GB Writes
Network Interfaces	Single or multiple 1G, 10G, 25G and 100G network interface options
Security	Secure Boot UEFI compliant BIOS, Boot Guard, TPM2.0
Remote Management	HTML5 and API based out of band management with MAC addresses identification, one time boot on next reboot option, PXE boot option
Operating Systems	Operating Systems supported include: Windows 10, CentOS, Red Hat Enterprise Linux, VMware vSphere, Windows Server
Power	 750W 80 PLUS Titanium 110/220V 50/60HZ autoswitching 850W 80 PLUS Titanium 110/220V 50/60HZ autoswitching
Carrying Case	Includes rugged airline carry-on case, small luggage form factor 10.60" H x 21.20" W x 16" D with telescoping handle & wheels. Note that 100% TSA compliance is: 9.0" H x 22" W x 14" D and this hard case package is slightly over that dimension in Height and Depth but compliant in Width. It is likely this will be allowed as carry-on unless physical inspection performed to exact dimensions are done by the airline at the gate
Physical	6.42" H x 17.65" W x 12.11" D. Complete solution including TSA carry-on compliant hard case range from 30 lbs to 45 lbs typically (single person lift)



Rugged carry-on case



Single-person lift, under <35 lbs total



Removable rack mount ears store in case

4 Townsend West, Building 17, Nashua, NH 03063 Phone: 1 (603) 886-3874 • Fax: 1 (603) 886-1736 www.NextComputing.com • sales@Nextcomputing.com



This document is for informational purposes only. Updates and changes can occur without notice. All logos, trademarks, and service marks are the property of their respective owners. Copyright © NextComputing all rights reserved.

SPECS

NEXTSTATION-X

PHYSICAL


Environmental	 0°C-40°C / 32°F-104°F. Non-Operating: -20°C-70°C, -4°F-158°F. Relative humidity (5-95%) non-condensing FCC Class A, CE, TUV, ROHS, Conflict Minerals Free
Warranty	1 year parts and labor. 2nd and 3rd year warranty options
Ease of Service and Upgrade	All storage is removable without tools. Easy access for install and removal of PCI Express cards. Easy to service other system elements. Modular design
Purpose-Built Solutions	Private label branding options. Purpose built application integration and configuration control management services.
Mounting Configuration	The NextStation-X can be operated on a table top, front rack mounted, or front access I-O rack mounted. Rack mounting can be done via only (2) rack mount ears or (4) rack mount ears (front and back). For vehicle and truck mount use all 4 rack ears front and back



Front I-O rack option



Rear I-O rack option

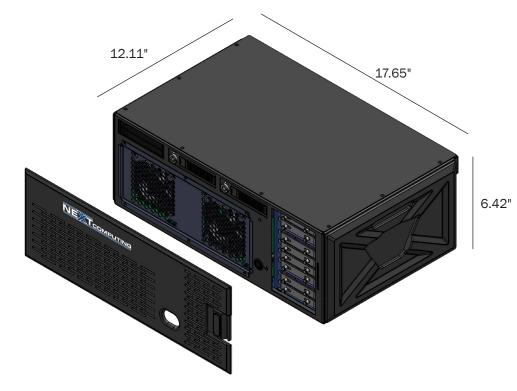

- Short depth 12.11" for rack mount
- Small footprint for desktop (includes rubber feet)
- Stackable on the desktop and cooling front to rear
- Grip-able side bezels and lightweight to carry
- Not tools removable front bezel to access removable SSDs

4 Townsend West, Building 17, Nashua, NH 03063 Phone: 1 (603) 886-3874 • Fax: 1 (603) 886-1736 www.NextComputing.com • sales@Nextcomputing.com



This document is for informational purposes only. Updates and changes can occur without notice. All logos, trademarks, and service marks are the property of their respective owners. Copyright © NextComputing all rights reserved.