





Studio One 2.0

Powerfully simple live production, minimal footprint.

STREAMS TO

vimeo · livestream








solutions.nextcomputing.com/livestream-studio

Studio One 2.0

Livestream Studio One 2.0 from NextComputing is an easy-to-use, reliable, compact switcher and encoder with mighty processing power. Stream up to 4K resolution, from multiple 4K, HDMI, or SDI inputs.



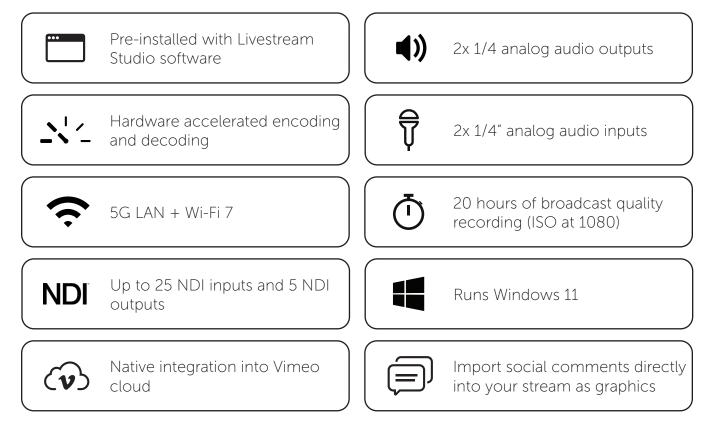

Studio One 2.0

External Multiscreen	Support for 2x 4K displays or 1x 8K display
Video and Audio I/O	 Up to 25 NDI inputs and 5 NDI outputs 1x HDMI 4K or SDI 4K out 2x ¼" jack Audio Inputs 2x ¼" jack Audio Outputs 4x HDMI 4K or 4x SDI or 4x SDI 4K inputs
Network	 5 Gigabit LAN 10/100/1000/2500/5000 Mb/s 802.11be 2x2 Wi-Fi 7 Module Supports IEEE 802.11a/b/g/n/ac/ax/axe/be Supports 2.4GHz/5GHz/6GHz frequency band* Supports 320MHz channel bandwidth with 6GHz frequency band 1 antenna to support 2 (Transmit) x 2 (Receive) diversity Supports Bluetooth 5.4 Supports MU-MIMO
Physical	• 15.57" (395.4mm) x 4.33" (110mm) x 14.72" (374mm)
Motherboard Key Features	 Powerful, Ultrafast Connectivity for streaming, ISO recording, and NDI I/O PCIe Gen5 (Graphics, M.2) Dual Channel DDR5 2 x Intel® Thunderbolt™ 4 ports Display interfaces for external displays and Intel® Xe LPG Graphics Architecture for Livestream Studio 1 x HDMI 2.1 TMDS/FRL 8G Compatible, supports HDR, HDCP 2.3 and max. resolution up to 4K 120Hz System Audio 1 x Line Out Jack (Gold Audio Jack) 7.1 CH HD Audio with Content Protection (Realtek RTL8126 Audio Codec)

